




TRN - SERIES SUBMERSIBLE - AERATOR

PERFORMANCE CURVE

MODEL	AIR INLET BORE	HP	KW	RPM	SOLIDS DIA	LIQUID	SG.	VISCOSITY	TEMP.
80TRN47.5-62	3" / 80mm	10	7.5	1748	0.591"/15mm	Water	1.0	1.123 cSt.	68°F
MIXING AREA	MAX. DEPTH	PHASE	VOLTAGE	AMPERAGE	HZ	STARTING METHOD	INS. CLASS		
845 ft ² / 78.5 m ²	14.8 ft / 4.5 m	3	208-230 / 460	xxx-27.0 / 13.6	60	Direct On Line	F		
CURVE No.	DATE	PHASE	VOLTAGE	AMPERAGE	HZ	STARTING METHOD	INS. CLASS		
-	-	-	-	-	-	-	-		

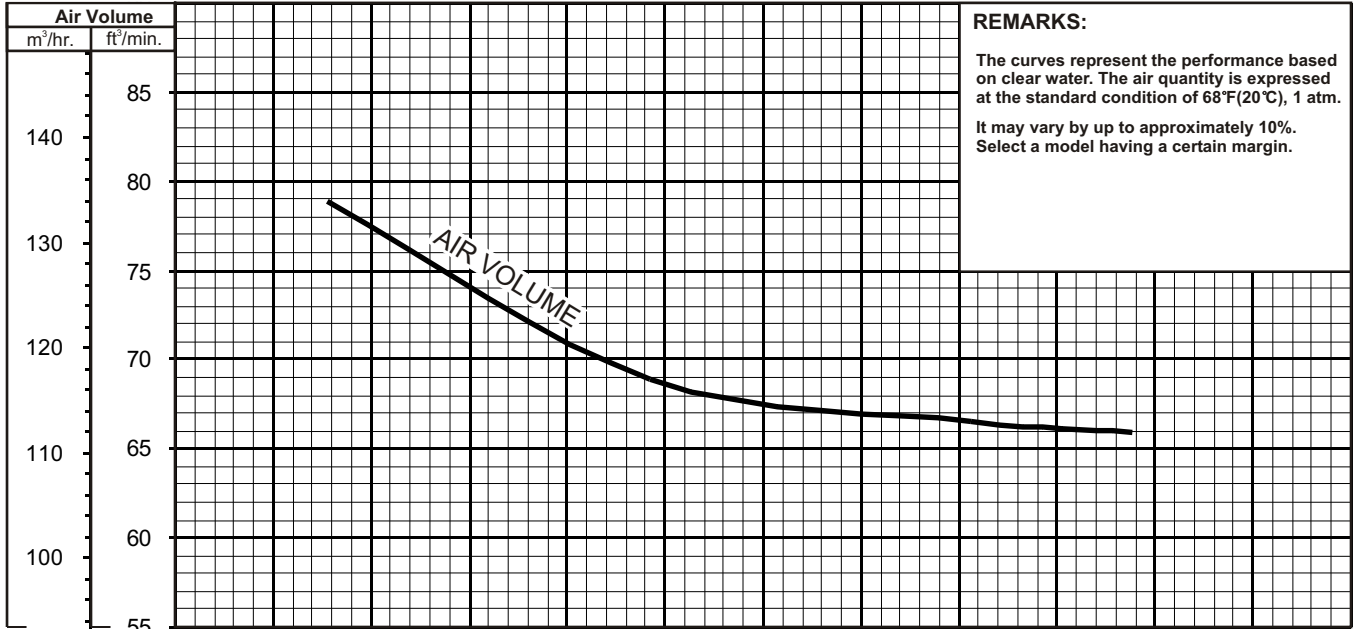

REMARKS:
The curves represent the performance based on clear water. The air quantity is expressed at the standard condition of 68°F(20°C), 1 atm. It may vary by up to approximately 10%. Select a model having a certain margin.

