




BER - SERIES SUBMERSIBLE - EJECTOR / AERATOR

PERFORMANCE CURVE

MODEL	AIR INLET BORE	HP	KW	RPM	SOLIDS DIA	LIQUID	SG.	VISCOSITY	TEMP.
(TOS-8-BER5S)	1" / 25mm	1	0.75	3455	0.787"/20mm	Water	1.0	1.123 cSt.	68°F
MIXING AREA	MAX. DEPTH	PHASE	VOLTAGE	AMPERAGE	HZ	STARTING METHOD	INS. CLASS		
64.6 ft ² / 6.0 m ²	11.5 ft / 3.5 m	Single	115 /230	xxx / 5.9	60	Capacitor Start	E		
CURVE No.	DATE	PHASE	VOLTAGE	AMPERAGE	HZ	STARTING METHOD	INS. CLASS		
-	-	-	-	-	-	-	-		

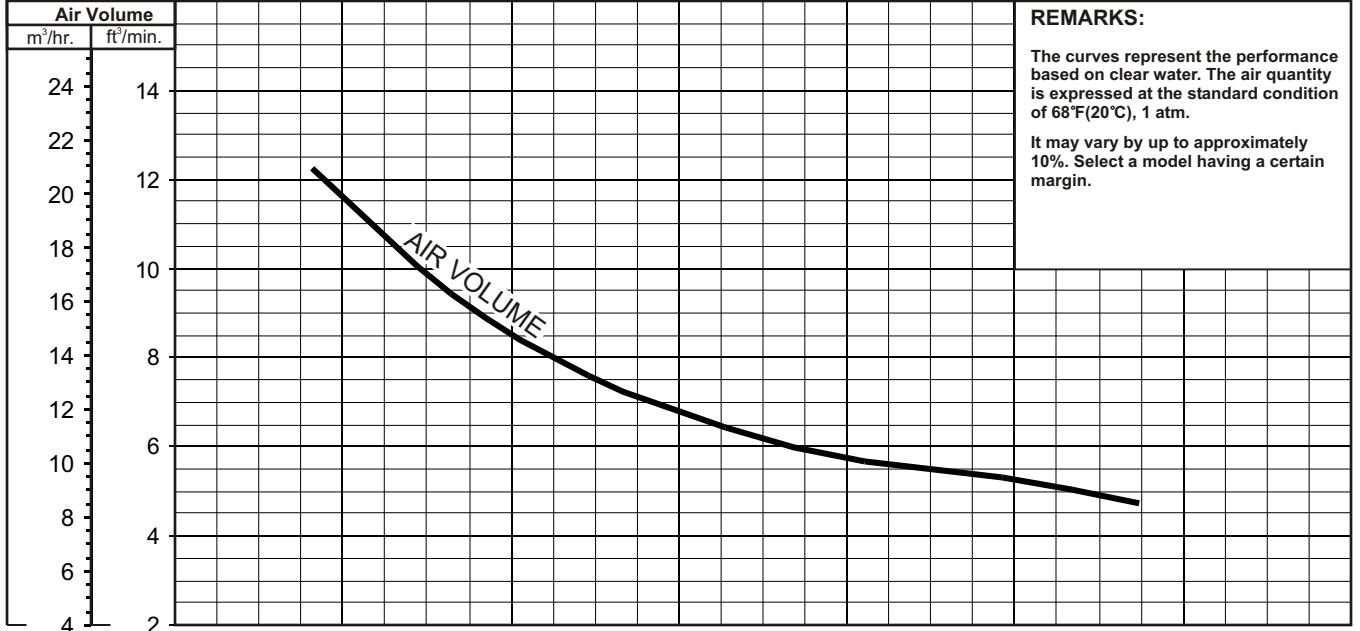

REMARKS:
The curves represent the performance based on clear water. The air quantity is expressed at the standard condition of 68°F(20°C), 1 atm.
It may vary by up to approximately 10%. Select a model having a certain margin.

