


SQ - 50SQ2-2.4S SINGLE PHASE PORTABLE CORROSION-RESISTANT PUMP

The SQ pump features a top discharge, flow-thru design with forced motor cooling that enables extended running at low water level. In addition, the SQ pump fits into an 8-inch pipe.

50SQ2-2.4S

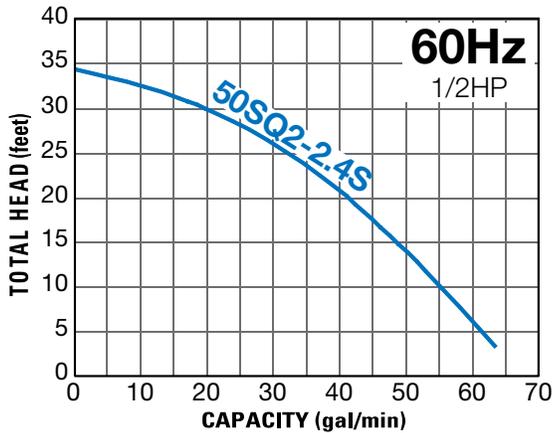

50SQ2-2.4S Features


- It is made of 304/316 stainless steel, Nitrile Butadiene Rubber and special resin to stand up to rust and corrosion, and sport a new structural design that makes them even lighter and easier to carry
- Non-toxic white mineral oil used to lubricate mechanical seals allows for use in food / agriculture industries
- Motor protector protects against overheating and run-dry
- Designed to fit into an 8-inch pipe

Certified by Intertek Testing Service to UL and CSA standards for submersible construction pumps.

Model	Motor Output (HP)	Phase	Discharge Bore (inch)	Cable Length (ft)	Dimension (inch)		Continuous Running Water Level (inch)	Shipping Weight (lbs.)
					Diameter	Height		
50SQ2-2.4S	1/2	Single	2	32	7 1/16	14 7/16	2 3/8	27

TM • TMA - SINGLE PHASE TITANIUM SEAWATER PUMP

Titanium construction, semi-vortex solids handling impeller. Ideal for saltwater and chemical applications.

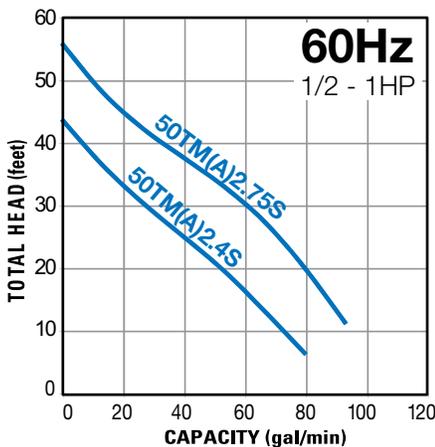

TM / TMA Series Features

- Titanium and FRP components increases corrosion resistance in a wide variety of applications
- Ideal use for salt water, site drainage and bilge pumps
- Available in manual operation (TM) and automatic operation (TMA)

Certified by Intertek Testing Service to UL and CSA standards for submersible construction pumps.

Model	Motor Output (HP)	Phase	Discharge Bore (inch)	Cable Length (ft)	Dimension (inch)		Continuous Running Water Level (inch)	Shipping Weight (lbs.)
					Diameter	Heights		
50TM2.4S	1/2	Single	2	32	9 15/16	14 3/16	12 3/4	23
50TMA2.4S	1/2	Single	2	32	9 15/16	14 3/4	23 7/8*	24
50TM2.75S	1	Single	2	32	9 15/16	14 15/16	13 5/8	25
50TMA2.75S	1	Single	2	32	9 15/16	15 1/2	24 5/8*	26

* Pump Starting Water Level