


SQ - 50SQ2.4S SINGLE PHASE 304 STAINLESS STEEL PUMP

All components of SQ pump including motor frame are made of SS 304 Stainless Steel.

50SQ2.4S

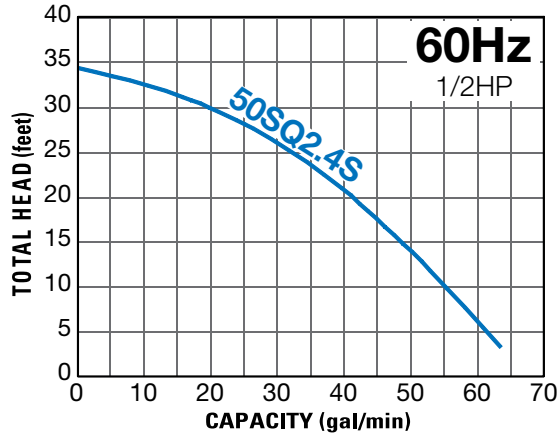

50SQ2.4S Features



- Non-toxic white mineral oil used to lubricate mechanical seals allows for use in food / agriculture industries
- Motor protector protects against overheating and run-dry
- Designed to fit into an 8-inch pipe

Certified by Intertek Testing Service to UL and CSA standards for submersible construction pumps.

Model	Motor Output (HP)	Phase	Discharge Bore (inch)	Cable Length (ft)	Dimension (inch)		Continuous Running Water Level (inch)	Shipping Weight (lbs.)
					Diameter	Height		
50SQ2.4S	1/2	Single	2	32	7 1/16	14 5/16	2 3/8	33

TM • TMA - SINGLE PHASE TITANIUM SEAWATER PUMP

Titanium construction, semi-vortex solids handling impeller. Ideal for saltwater and chemical applications.

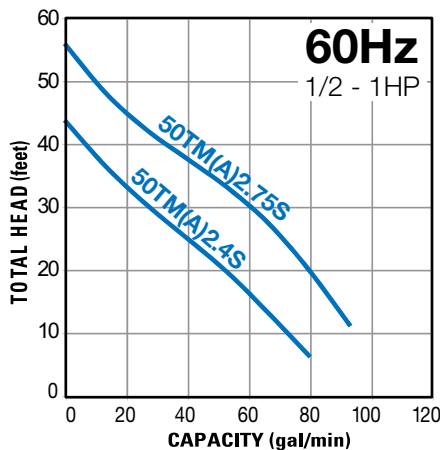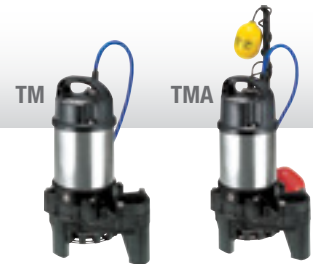

TM / TMA Series Features

- Titanium and FRP components increases corrosion resistance in a wide variety of applications
- Ideal use for salt water, site drainage and bilge pumps
- Available in manual operation (TM) and automatic operation (TMA)

Certified by Intertek Testing Service to UL and CSA standards for submersible construction pumps.

Model	Motor Output (HP)	Phase	Discharge Bore (inch)	Cable Length (ft)	Dimension (inch)		Continuous Running Water Level (inch)	Shipping Weight (lbs.)
					Diameter	Heights		
50TM2.4S	1/2	Single	2	32	9 15/16	14 3/16	12 3/4	23
50TMA2.4S	1/2	Single	2	32	9 15/16	14 3/4	23 7/8*	24
50TM2.75S	1	Single	2	32	9 15/16	14 15/16	13 5/8	25
50TMA2.75S	1	Single	2	32	9 15/16	15 1/2	24 5/8*	26

* Pump Starting Water Level