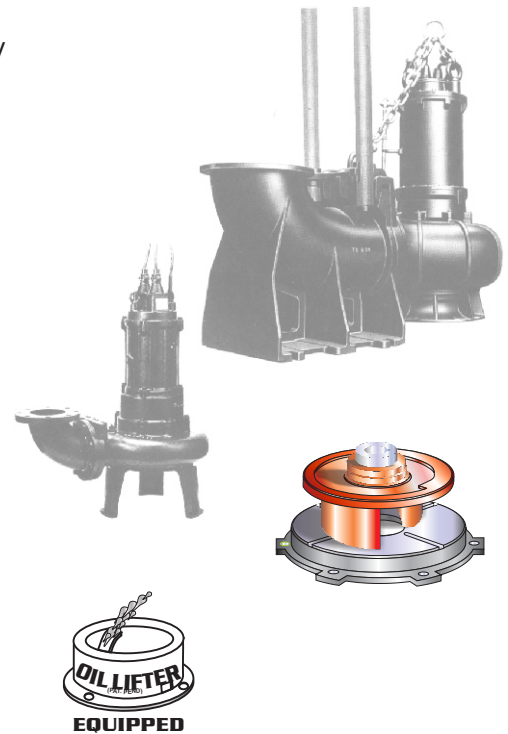


■ FEATURES

1. Semi-open, Single vane, impellers with field adjustable /replaceable shear plate and, Enclosed Multi-vane, impellers, with field adjustable / replaceable wear plate provides for high wear resistance and enhanced solids handling capability.
2. Highly efficient, continuous duty air filled, copper wound motor with class E, B, F insulation minimizes the cost of operation.
3. Built in thermal protection prevents motor failure due to overloading, accidental run-dry and single phasing in three phase units.
4. Double inside mechanical seals with silicon carbide faces, running in an oil filled chamber, equipped with an oil lifter,, and further protected by an exclusionary oil Seal(s), provides for the most -
- durable seal design available.
5. Double shielded, permanently lubricated, high temperature C3 ball bearings rated for a B-10 life of 60,000 hours provide for extended operational life.

■ APPLICATIONS

1. Commercial, Industrial sewage, wastewater, or effluent transfer.
2. Decorative fountains and aquiculture .
3. Raw water supply from rivers or lakes.



■ SPECIFICATIONS

Discharge Size
 Horsepower Range
 Performance Range, Capacity
 Head
 Maximum water temperature
 Materials of Construction
 Casing
 Impeller
 Shaft
 Motor Frame
 Fasteners
 Mechanical Seal
 Elastomers
 Impeller Type
 Solids Handling Capability
 Bearings
 Motor Nomenclature
 Type, Speed, Hz.
 Voltage, Phase
 Insulation
 Accessories
 Operational Mode

■ STANDARD

2" ~ 8" (50 ~ 200 mm)
 1 Hp. ~ 20 Hp. (.75 kW ~ 20 kW)
 20 ~ 1850 G.P.M. (.08 ~ 7.00 m³/min)
 8.2 Ft.~105.0 Ft. (2.5 ~ 32.0m)
 104° F. (40° C.)
 Cast Iron, ASTM 48 Class 35
 Cast Iron, ASTM 48 Class 35
 403,420 Stainless Steel
 Cast Iron, ASTM 48 Class 30
 304 Stainless Steel
 Silicon Carbide
 NBR (Nitril Buna Rubber)
 Semi-open, Enclosed, solids handling.
 .79" ~ 2.95" (20 ~ 75 mm)
 Pre-lubricated, Double Shielded
 Air Filled,
 3600, 1800 & 1200 Rpm, 60 Hz.
 115 or 230 (1Phase)
 208-230, 460 or 575 V., (3 Phase)
 Class E, B, F
 Submersible Power Cable 32' (10 m)
 Manual

■ OPTIONS

Dry-Pit

Nema 3R inverter available for
 230 V., 1 Ph. operation from 2~5
 Hp.

Length as required.
 TO/TOS Slide Rail System

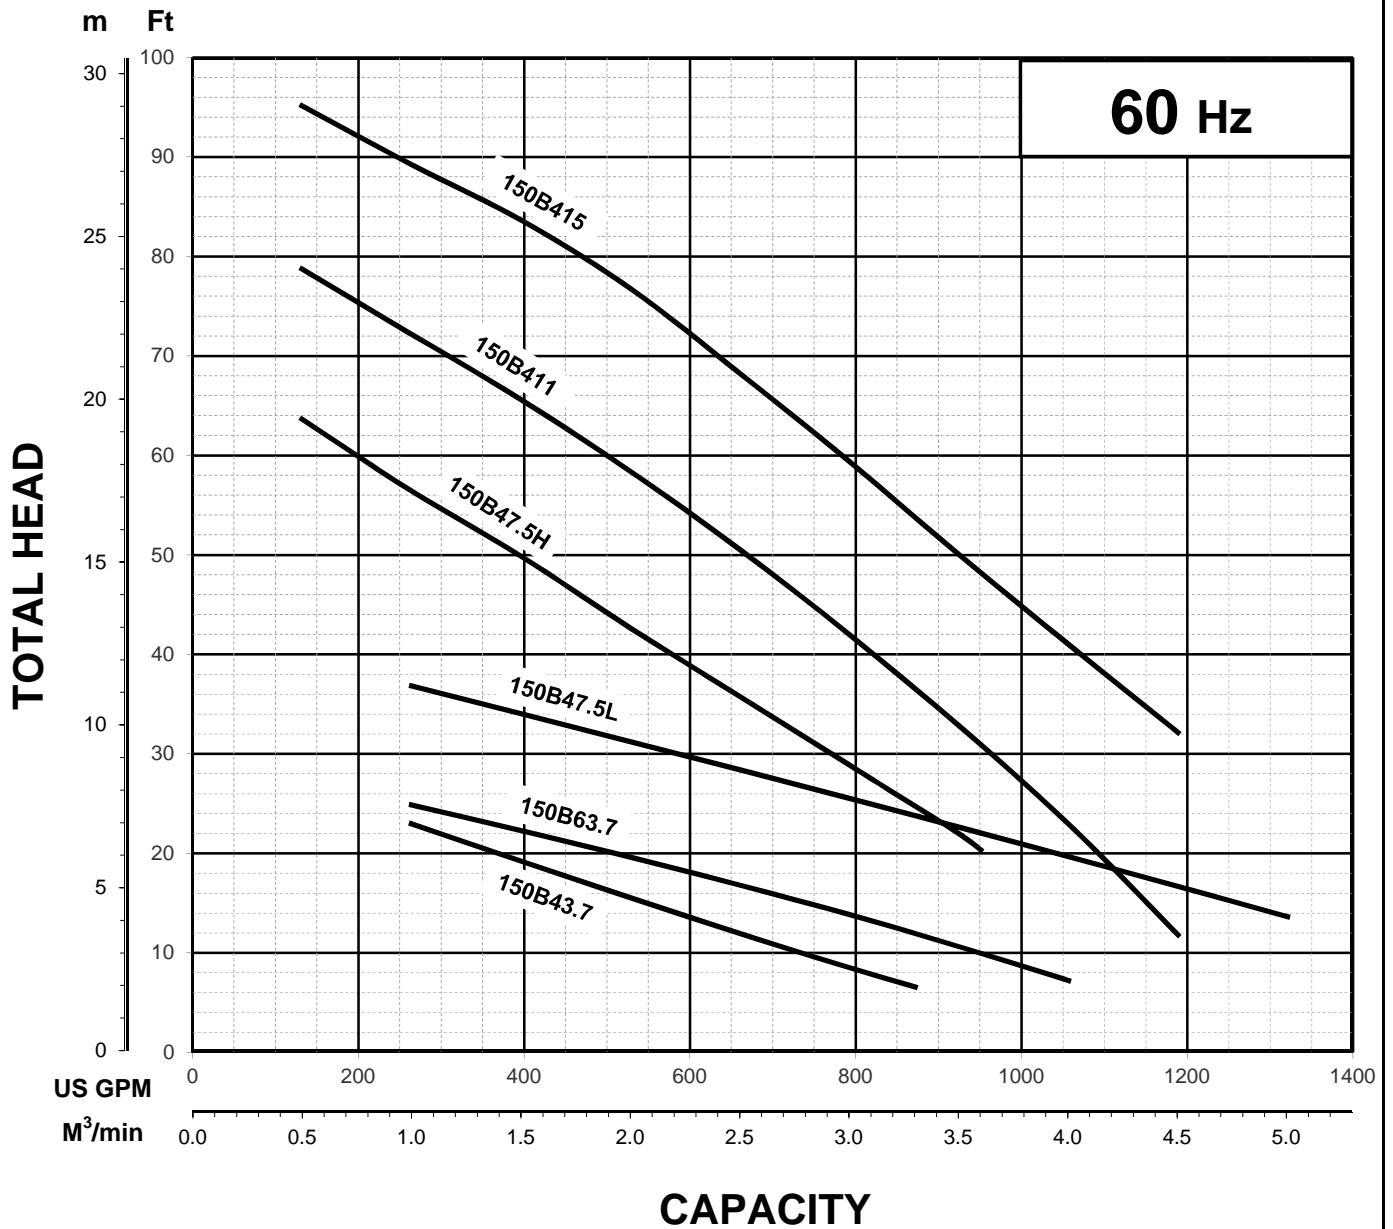


B - SERIES 6"

SEWAGE & WASTEWATER PUMPS

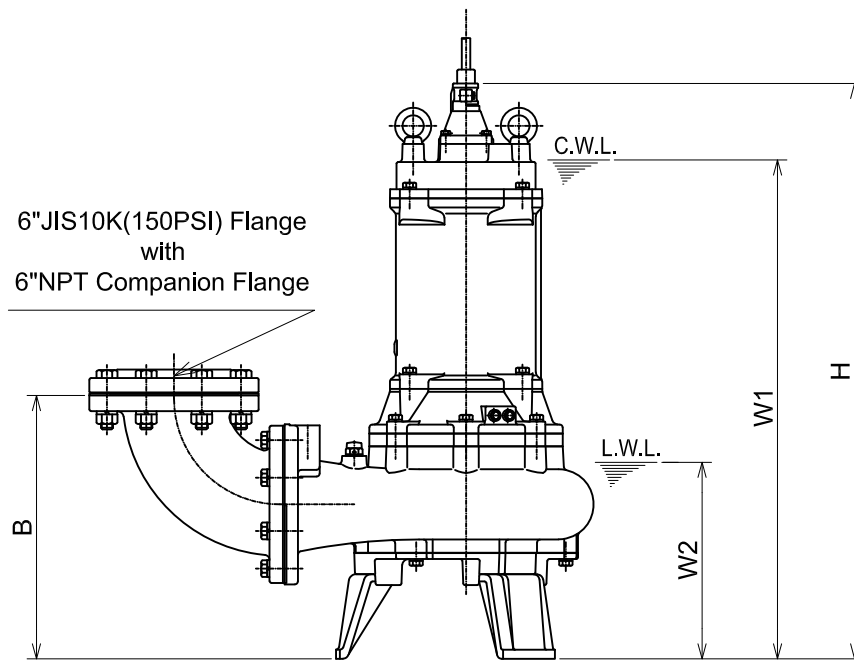
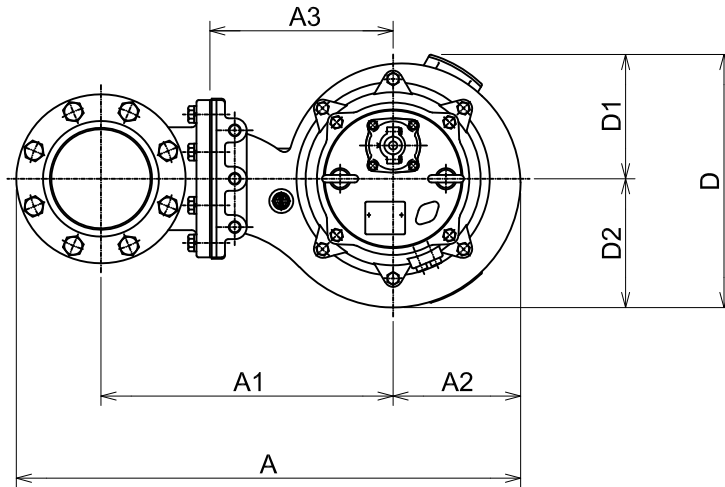
PERFORMANCE
CURVE

GROUP PERFORMANCE RANGE



Note

Ex.

**TSURUMI PUMP**
B-SERIES
SEWAGE & WASTEWATER PUMPS
DIMENSIONS**150B47.5H -64**

C.W.L. :Continuous running Water Level
 L.W.L. :Lowest running Water Level

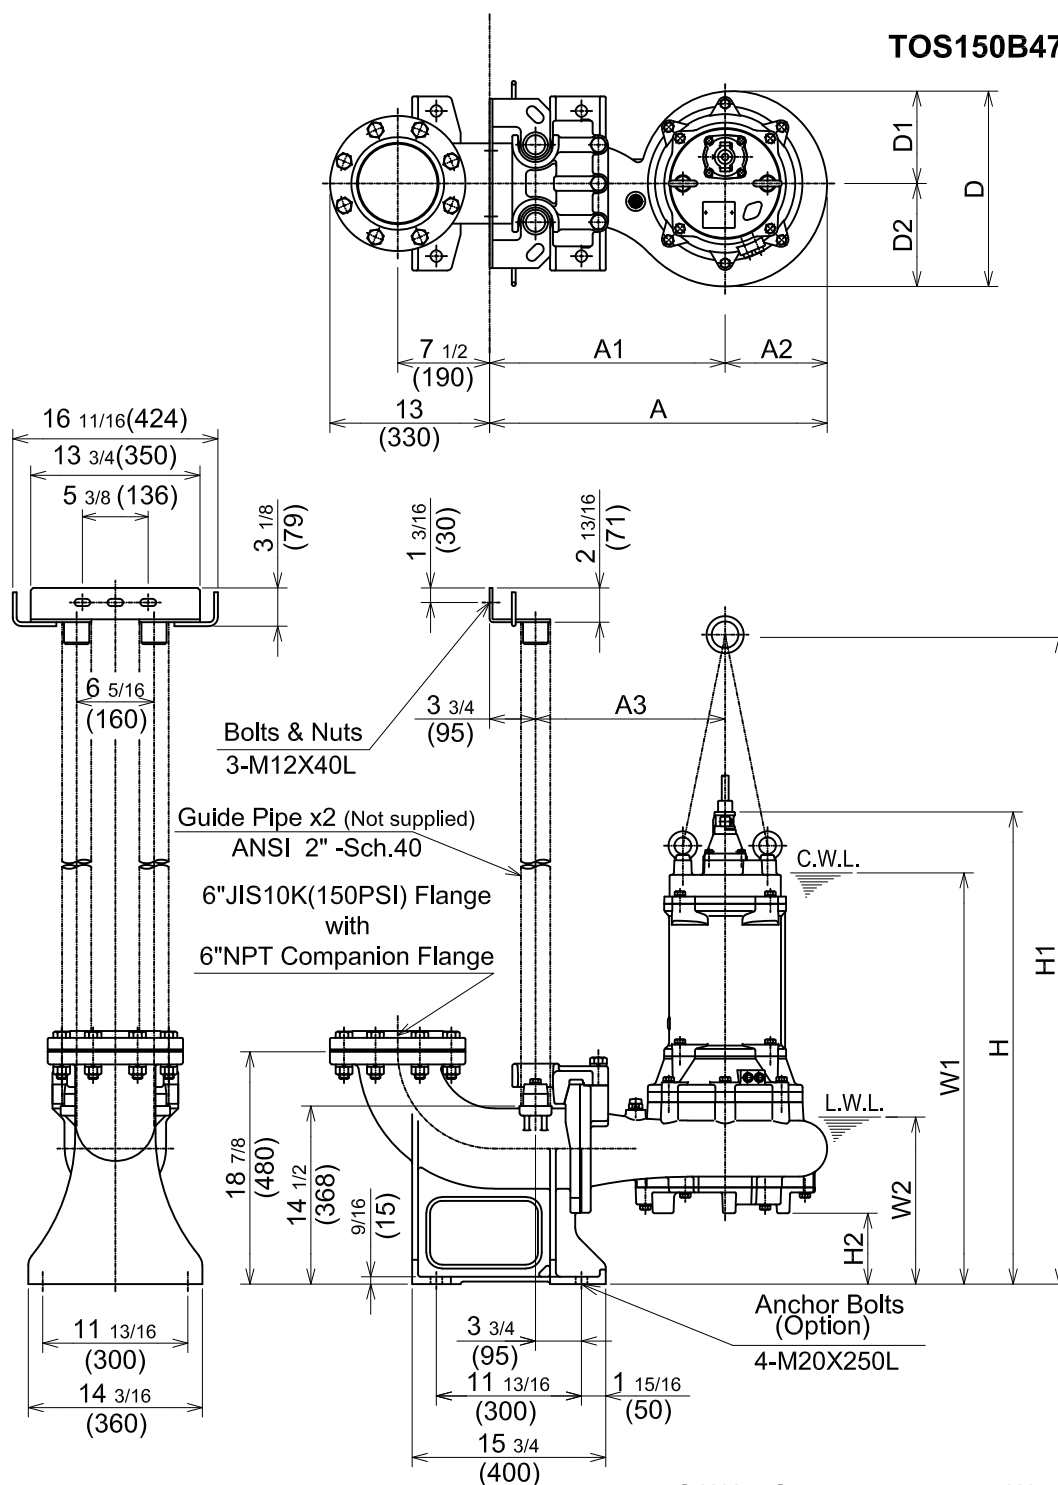
DIMENSIONS:USCS (Inch)

| Model | HP | NOM. SIZE | Pump & Motor | | | | | | | | | C.W.L. | L.W.L. | Wt. (lbs.) |
|--------------|----|--------------|--------------|----|--------|----------|---------|---------|--------|-------|--------|--------|--------|---------------|
| | | | A | A1 | A2 | A2 | B | D | D1 | D2 | H | W1 | W2 | |
| 150B47.5H-64 | 10 | 6" | 32 13/16 | 19 | 8 5/16 | 11 13/16 | 17 3/16 | 16 7/16 | 8 1/16 | 8 3/8 | 37 1/2 | 32 5/8 | 12 3/4 | 463 |

DIMENSIONS:METRIC (mm)

*Excluding Cable

| Model | kW | NOM. SIZE | Pump & Motor | | | | | | | | | C.W.L. | L.W.L. | Wt. (kg) |
|--------------|-----|--------------|--------------|-----|-----|-----|-----|-----|-----|-----|-----|--------|--------|-------------|
| | | | A | A1 | A2 | A3 | B | D | D1 | D2 | H | W1 | W2 | |
| 150B47.5H-64 | 7.5 | 150 | 834 | 483 | 211 | 300 | 436 | 418 | 205 | 213 | 952 | 830 | 325 | 210 |

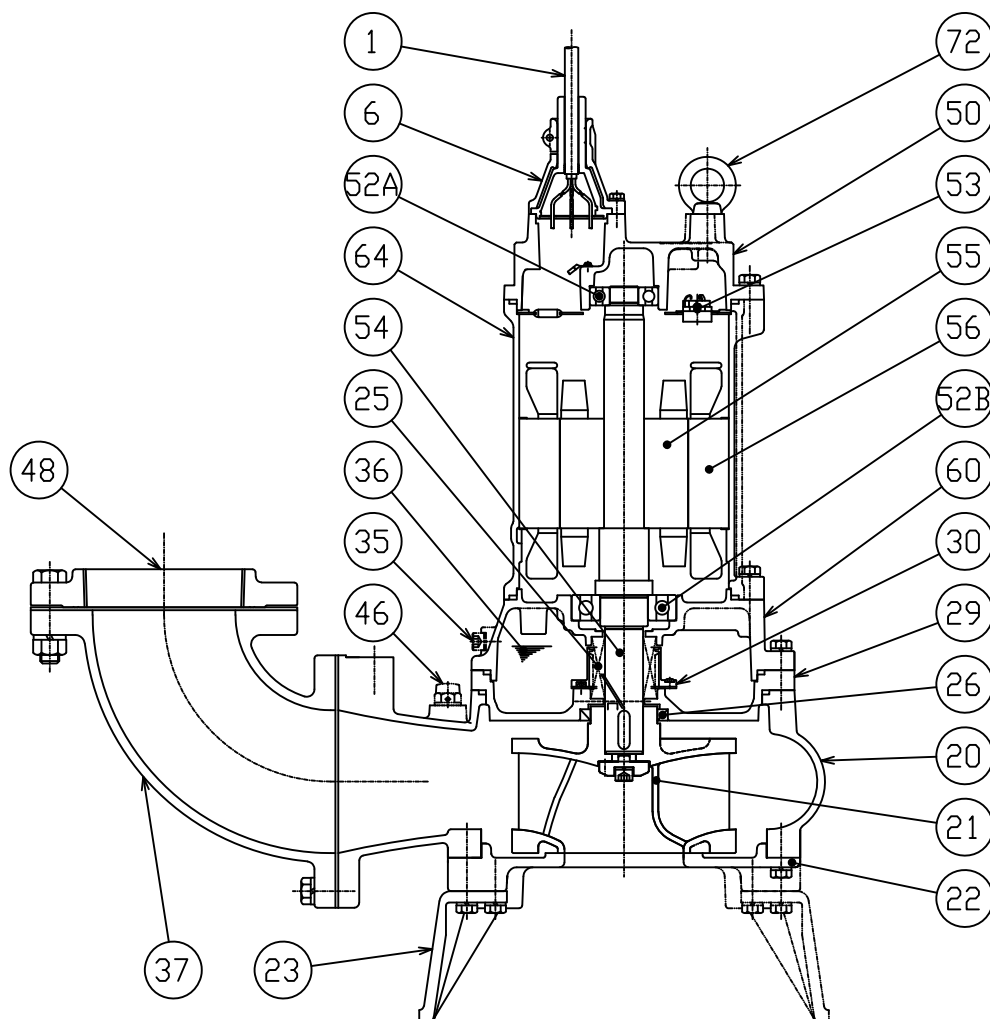
**TSURUMI PUMP**
B-SERIES
SEWAGE & WASTEWATER PUMPS
DIMENSIONS**TOS150B47.5H -64****DIMENSIONS:USCS (Inch)**

| Model | HP | NOM. SIZE | Pump & Motor | | | | | | | | | | C.W.L. | L.W.L. | *Wt. (lbs.) |
|-----------------|----|-----------|--------------|---------|--------|---------|--------|-------|-------|---------|----------|---------|--------|--------|-------------|
| | | | A | A1 | A2 | A3 | D | D1 | D2 | H | H1 | H2 | W1 | W2 | |
| TOS150B47.5H-64 | 10 | 6" | 27 1/2 | 19 3/16 | 8 5/16 | 15 7/16 | 15 7/8 | 7 1/2 | 8 3/8 | 38 7/16 | 52 13/16 | 5 13/16 | 33 5/8 | 13 5/8 | 397 |

DIMENSIONS:METRIC (mm)

| Model | kW | NOM. SIZE | Pump & Motor | | | | | | | | | | C.W.L. | L.W.L. | *Wt. (kg) |
|-----------------|-----|-----------|--------------|-----|-----|-----|-----|-----|-----|-----|------|-----|--------|--------|-----------|
| | | | A | A1 | A2 | A3 | D | D1 | D2 | H | H1 | H2 | W1 | W2 | |
| TOS150B47.5H-64 | 7.5 | 150 | 698 | 487 | 211 | 392 | 404 | 191 | 213 | 976 | 1342 | 147 | 855 | 345 | 180 |

*Excluding TOS & Cable

**TSURUMI PUMP**
B-SERIES
SEWAGE & WASTEWATER PUMPS
SECTIONAL VIEW**150B47.5H -64**

| PART# | DESCRIPTION | MAIN MATERIAL / NOTE | RELATED ASTM, AISI CODE | RELATED EN CODE | QTY |
|-------|------------------|-----------------------------------|-------------------------|-----------------|-----|
| 1 | Power Cable | Chloroprene Sheath AWG10/4-32ft | | | 1 |
| 6 | Stuffing Box | Cast Iron | A48M Class 30B | EN 1561 GJL-200 | 1 |
| 20 | Pump Casing | Cast Iron | A48M Class 30B | EN 1561 GJL-200 | 1 |
| 21 | Impeller | Cast Iron | A48M Class 30B | EN 1561 GJL-200 | 1 |
| 22 | Suction Cover | Cast Iron | A48M Class 30B | EN 1561 GJL-200 | 1 |
| 23 | Pump Stand | Cast Iron | A48M Class 30B | EN 1561 GJL-200 | 3 |
| 25 | Mechanical Seal | Silicon Carbide / H-40X | | | 1 |
| 26 | Oil Seal | NBR / TC-709212 | | | 1 |
| 29 | Oil Casing | Cast Iron | A48M Class 30B | EN 1561 GJL-200 | 1 |
| 30 | Oil Lifter | PBT Resin W/GF40 | | | 1 |
| 35 | Oil Plug | Stainless Steel | S 30400 | 1.4301 | 2 |
| 36 | Lubricant | Turbine Oil ISO VG32 or SAE10W-20 | | | |
| 37 | Discharge Bend | Cast Iron | A48M Class 30B | EN 1561 GJL-200 | 1 |
| 46 | Air Valve | Nylon | | | 1 |
| 48 | Companion Flange | Cast Iron / NPT 6" | A48M Class 30B | EN 1561 GJL-200 | 1 |
| 50 | Motor Bracket | Cast Iron | A48M Class 30B | EN 1561 GJL-200 | 1 |
| 52A | Upper Bearing | #AC-6306ZZC3 | | | 1 |
| 52B | Lower Bearing | #6310ZZC3 | | | 1 |
| 53 | Motor Protector | | | | 1 |
| 54 | Shaft | Stainless Steel | S 42000 | 1.4028 | 1 |
| 55 | Rotor | | | | 1 |
| 56 | Stator | | | | 1 |
| 60 | Bearing Housing | Cast Iron | A48M Class 30B | EN 1561 GJL-200 | 1 |
| 64 | Motor Housing | Cast Iron | A48M Class 30B | EN 1561 GJL-200 | 1 |
| 72 | Lifting Lug Bolt | Steel | A283 Grade D | EN 10025 S275 | 2 |

**TSURUMI PUMP**

B - SERIES

SEWAGE & WASTEWATER PUMPS

SAMPLE

SPECIFICATIONS

1. SCOPE OF SUPPLY -

Furnish and install TSURUMI Model _____ Submersible Pump(s). Each unit shall be capable of delivering _____ GPM (_____ m³/min) at _____ Feet (_____ m) TDH. The pump(s) shall be designed to pump waste water, sewage or effluent containing _____ inch (_____ mm) diameter solids without damage during operation. The pump(s) shall be designed so that the shaft power required (BHP)/(kW) shall not exceed the motor rated output throughout the entire operating range of the pump performance curve. The pump discharge size shall be _____ inch, (_____ mm).

2. MATERIALS OF CONSTRUCTION -

Construction of major parts of the pumping unit(s) including pump casing, impeller, and discharge elbow shall be manufactured from gray cast iron, ASTM A48 CLASS 30B. Unit(s) shall have a field adjustable and or replaceable, cast iron shear type wear plate or wear rings. Internal and external surfaces coming into contact with the pumpage shall be protected by a fused polymer coating. All exposed fasteners shall be stainless steel. All units shall be furnished with a discharge elbow with 150 lb. (10 kg/cm²) ANSI flange or flat face flange and NPT companion flange. Impellers shall be of the solids handling design and shall be slip fit to the shaft and key driven. The pump casing shall incorporate an air relief valve.

3. MECHANICAL SEAL -

All units shall be furnished with a dual inside mechanical shaft seal located completely out of the pumpage, running in a separate oil filled chamber and further protected by an exclusionary oil seal located between the bottom seal faces and the fluid being pumped. All units shall be fitted with a device that shall provide positive lubrication of top mechanical seal, (down to one third of the standard oil level). The device shall not consume any additional electrical power. Mechanical seals shall rated to preclude the incursion of water up to 42.6 PSI. (98.4 Ft.), 56.8 PSI.(131.2 Ft.), 71.1 PSI.(164.0 Ft.). Units shall have silicon carbide mechanical seal faces. Mechanical seal hardware shall be stainless steel.

4. MOTOR -

The pump motor(s) shall be _____ Hp., _____ kW., _____ V., 60 Hz., _____ Phase and shall be NEMA MG-1, Design Type B equivalent. Motor(s) shall be rated at _____ full load amps. Motor(s) shall have a 1.15 service factor and shall be rated for 10(1 Hp.), 5-6(2 to 5 Hp.), 3-4(7.5 to 20 Hp.), and 2-3(30 Hp. and above) starts per hour. Motor(s) shall be air filled, copper wound, class E, B, or F insulated with built in thermal protection for each winding. Motor shaft shall be 420 or 403 stainless steel and shall be supported by two permanently lubricated, high temperature ball bearings, with a B-10 life rating at best efficiency point of 60,000 hours. On units up to 10 Hp. (7.5 kW), the bottom bearing shall be single row, double shielded, C3, deep groove type ball bearings. On units 15 Hp. (11 kW) and above, the bottom bearing shall be two row, double shielded, C3, deep groove type ball bearings. The top bearing on all units shall be single row, double shielded, C3, deep groove type ball bearings. Motor housing and bearing housing shall be gray cast iron, ASTM A48 CLASS 25B or 30B(150B63.7, 7.5 Hp. and above). Motors shall be D.O.L. or Star-delta start (15 Hp. and above), and shall be suitable for across the line start or variable speed applications, utilizing a properly sized variable frequency drive.

5. POWER CABLE AND CABLE ENTRANCE -

The pump power cable shall be suitable for submersible pump applications. Units up to 5 Hp., (except 150B63.7) shall be supplied with a cable entrance that incorporates built in strain relief, a one piece, three way mechanical compression seal with a fatigue reducing cable boot. On units 7.5 Hp. and above, and 150B63.7, the cable entrance shall incorporate built in strain relief, and combination three way mechanical compression sealing with a fatigue reducing/thermal expansion rubber boot. The power cable shall be field replaceable utilizing standard submersible pump cable. The cable entrance assembly on all units shall contain an anti-wicking block to eliminate water incursion into the motor due to capillary wicking should the power cable be accidentally Damaged.