



## GSZ-4/6 - SERIES

[4Pole] HIGH VOLUME - DEWATERING PUMP  
[6Pole] HIGH VOLUME - SAND PUMP & AGITATOR PUMP

## SPECIFICATIONS

### ■ FEATURES

1. Enclosed, high chrome cast iron or Stainless Steel impeller with field adjustable/replaceable wear plate provides for high wear resistance when the pumpage contains abrasive particles.
2. Highly efficient, continuous duty air filled, copper wound motor with class F, E, insulation minimizes the cost of operation.
3. Built in thermal protection prevents motor failure due to overloading, accidental run-dry and single phasing in three phase units.
4. Double inside mechanical seals with silicon carbide faces, running in an oil filled chamber, further protected by a labyrinth seal, running against a replaceable, 430 stainless steel shaft sleeve and seal pressure relief ports,-
5. Double shielded, permanently lubricated, high temperature C3 ball bearings rated for a B-10 life of 60,000 hours provide for extended operational life.
6. The agitator installed on the motor shaft extension forcibly agitates the fluid for easy and efficient Transmission of sludge and slime. (GSZ5-37-6SK)

### ■ APPLICATIONS

1. Commercial, industrial wastewater and construction site drainage.
2. Sand & Gravel pit drainage.
3. Sediment removal from sumps or basins.



### ■ SPECIFICATIONS

Discharge Size  
Horsepower Range  
Performance Range Capacity  
Head  
Maximum water temperature  
Materials of Construction  
Casing  
Impeller  
Shaft  
Motor Frame  
Fasteners  
Seal Pressure Relief ports  
Mechanical Seal  
Elastomers  
Impeller Type  
Solids Handling Capability  
  
Bearings  
  
Motor Nomenclature  
Type, Speed, Hz.  
Voltage, Phase  
Insulation  
  
Accessories  
  
Operational Mode

### ■ STANDARD

6"~10" NPT (150mm ~ 250 mm)  
30 HP.~ 100 HP. (22 kW ~ 75 kW)  
528 ~ 4621 GPM (2.0 ~17.5 m<sup>3</sup>/min)  
24.6 Ft. ~ 197.0 Ft. (7.5 m ~ 60.0 m)  
104°F. (40°C.)  
  
Cast Iron  
High Chrome Iron/Stainless Steel  
420 Stainless Steel  
Cast Iron/Steel Jacket  
304 Stainless Steel  
4P-1800RPM Motor Model  
Silicon Carbide  
NBR (Nitrile Butadiene Rubber)  
Enclosed, Open, solids handling  
0.394 ~ 1.97" (10 - 50mm)  
  
Prelubricated, Double Shielded  
  
Air Filled, 1200 & 1800 Rpm, 60 Hz.  
460 or 575 V., 3 Phase  
Class F or E  
  
Submersible Power Cable 50' (15 m)  
  
Manual

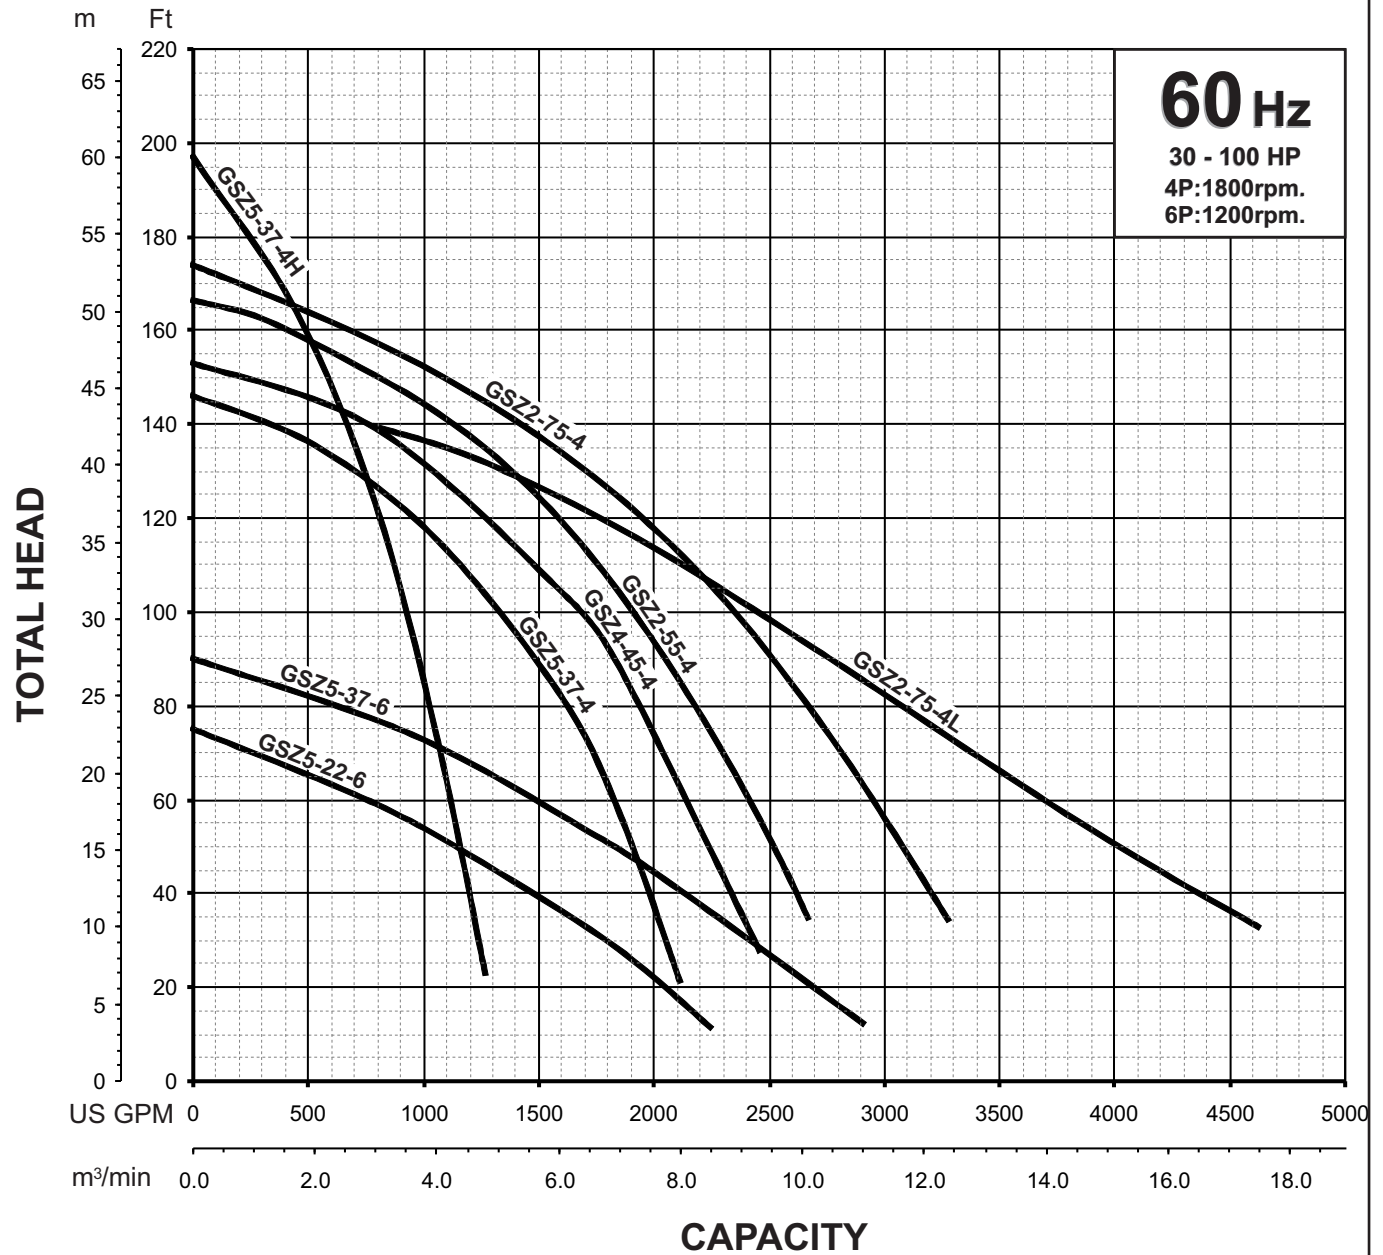
### ■ OPTIONS

Length as Required.


**TSURUMI PUMP**
**GSZ - SERIES**

[4 Pole] High Volume - Dewatering Pumps

[6 Pole] High Volume - Sand Pumps &amp; Agitator Pump

**PERFORMANCE  
RANGE**
**GROUP PERFORMANCE RANGE**




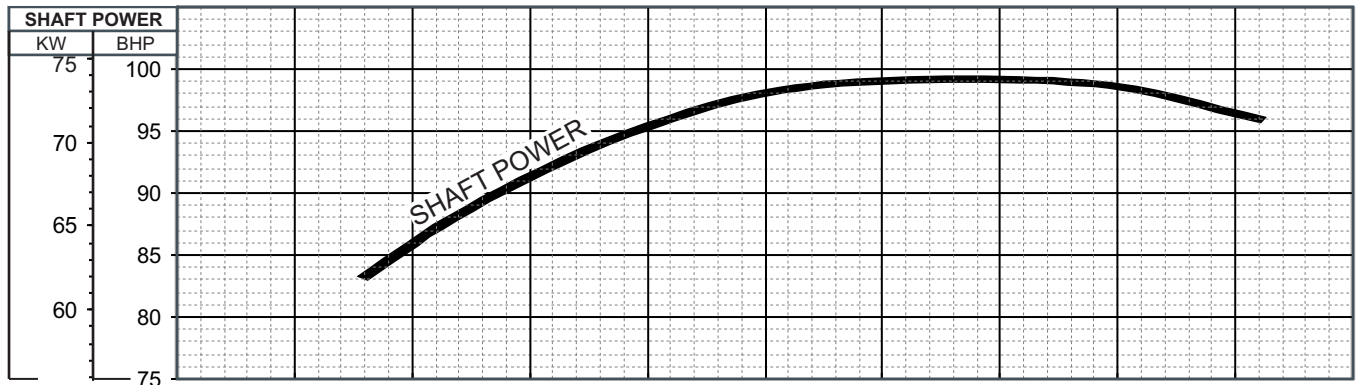
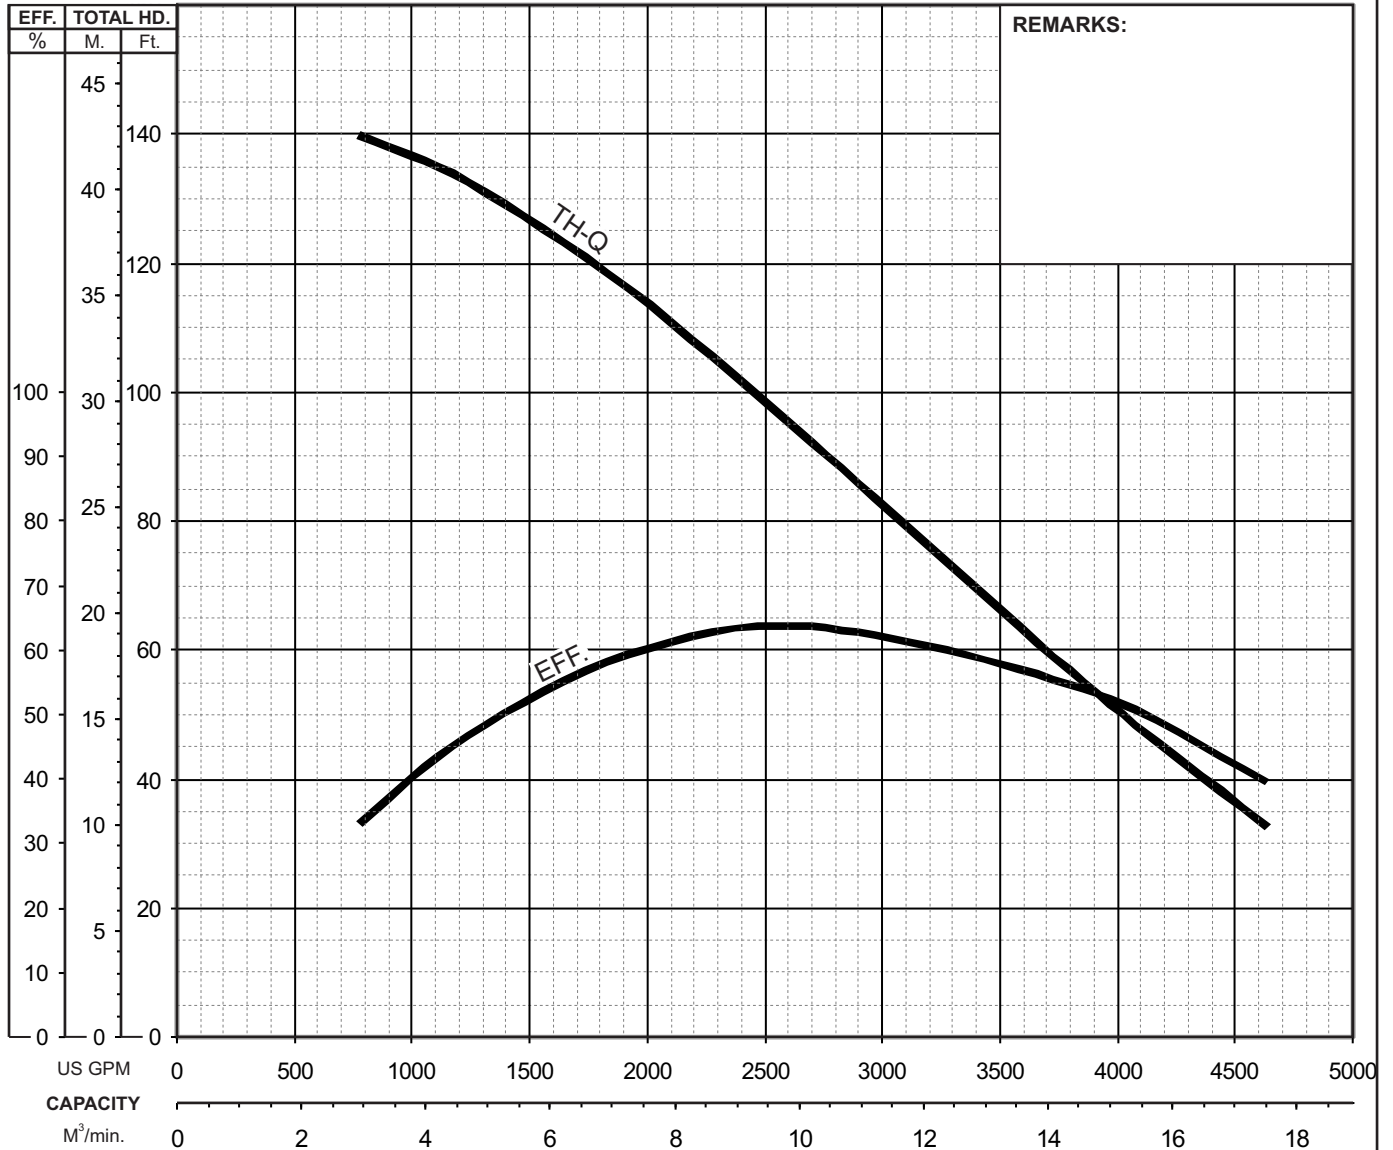
# GSZ-4 SERIES

## HIGH VOLUME - DEWATERING PUMPS

# PERFORMANCE

## CURVE

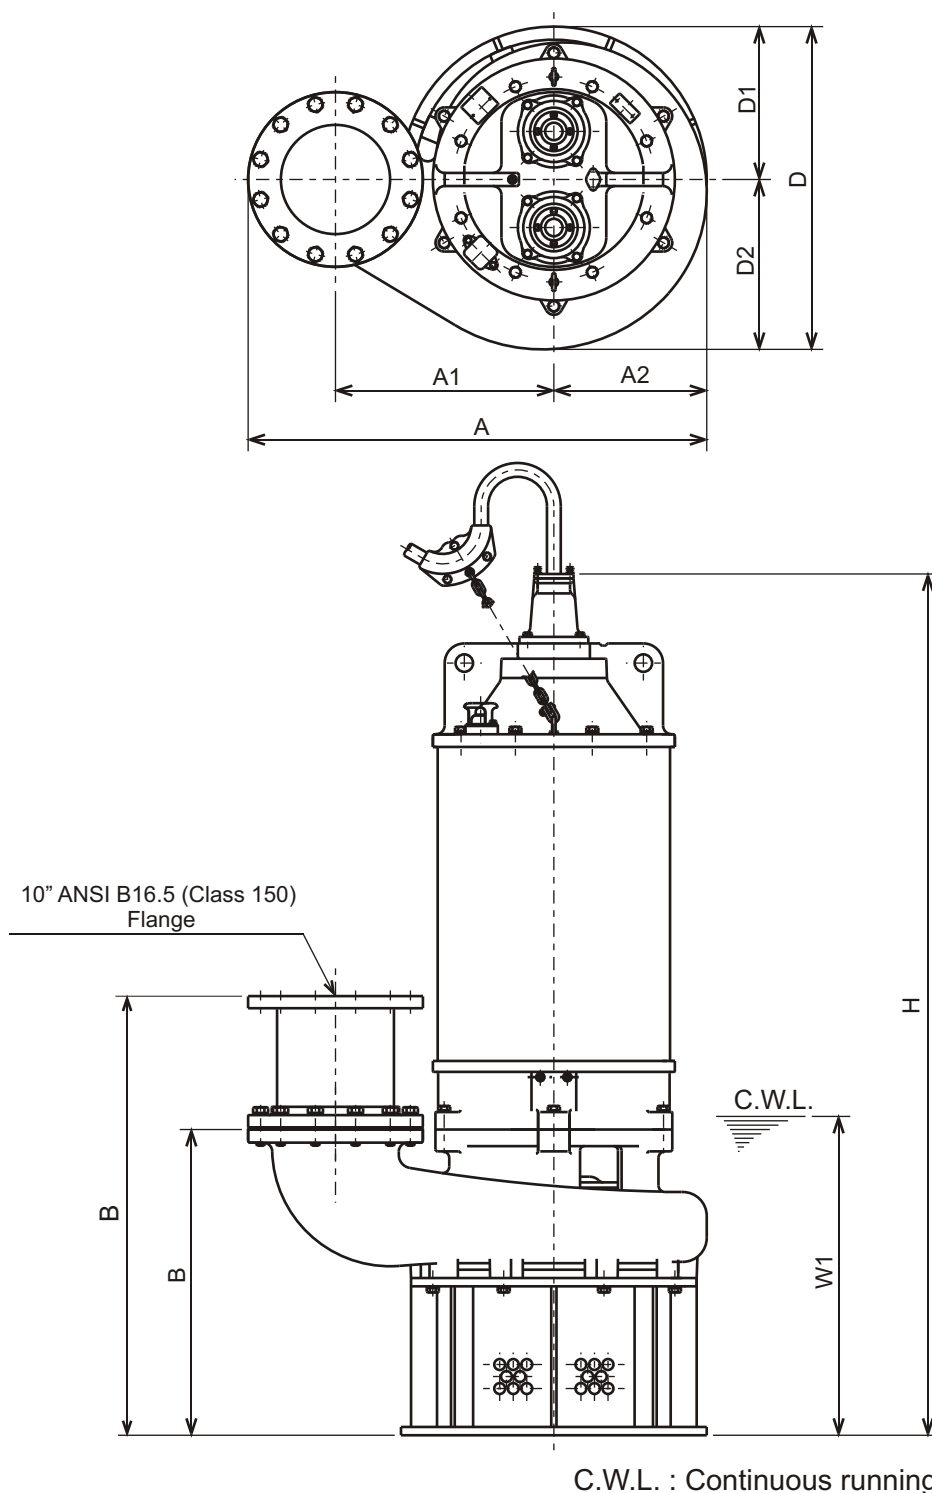
MODEL		BORE	HP	KW	RPM	SOLIDS DIA		LIQUID		SG.	VISCOSITY	TEMP.
GSZ2-75-4L		10"/250mm	100	75	1775	0.984"/25mm		Water		1.0	1.123 cSt.	60°F
PUMP TYPE		PHASE	VOLTAGE		AMPERAGE		HZ	STARTING METHOD			INS. CLASS	
High Volume - Dewatering Pump		3	460 / 575		128 / 101		60	Star-Delta			E	
CURVE No.		DATE	PHASE	VOLTAGE	AMPERAGE		HZ	STARTING METHOD			INS. CLASS	
-		-	-	-	-		-	-			-	





# **GSZ-4 SERIES** **HIGH VOLUME - DEWATERING PUMPS**

## **DIMENSIONS**

**GSZ2-75-4L**


C.W.L. : Continuous running Water Level

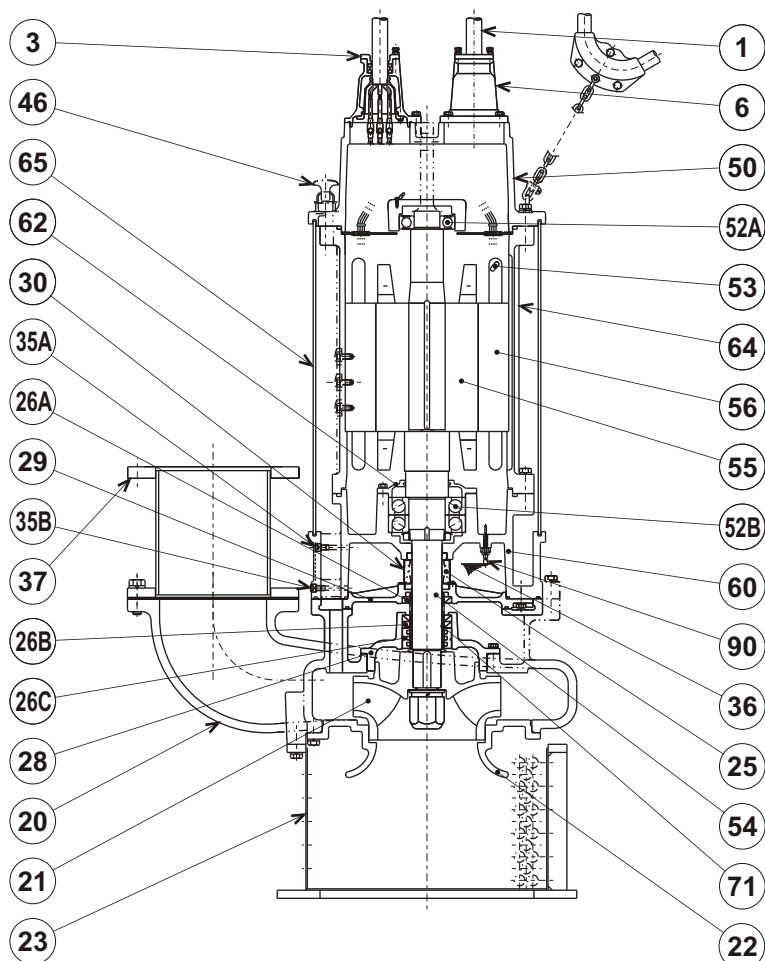
**DIMENSIONS:USCS (In ch)**

Model	HP	NOM. SIZE	Pump & Motor									C.W.L.	*Wt.
			A	A1	A2	B	B1	D	D1	D2	H	W1	(lbs.)
GSZ2-75L-4	100	10"	41 5/16	19 11/16	13 3/4	39 9/16	27 9/16	29 1/8	13 3/4	15 5/16	77 5/8	28 3/4	2730

**DIMENSIONS:METRIC (mm)**

\*Excluding Cable

Model	kW	NOM. SIZE	Pump & Motor									C.W.L.	*Wt.
			A	A1	A2	B	B1	D	D1	D2	H	W1	(kg)
GSZ2-75L-4	75	250	1050	500	350	1005	700	739	350	389	1972	730	1238


**GSZ2-75-4L**

ITEM#	DESCRIPTION	MAIN MATERIAL / NOTE	ASTM, AISI CODE	RELATED EN CODE	Q'TY
1	Power Cable	Chloroprene Sheath AWG 2/3 , 6/1 , 14/2 -50ft			1
	Power Cable	Chloroprene Sheath AWG 2/3 -50ft			1
3	Gland	Cast Iron	A48M Class30B	EN 1561 GJL-200	2
6	Stuffing Box	Cast Iron	A48M Class30B	EN 1561 GJL-200	1
20	Pump Casing	Cast Iron	A48M Class30B	EN 1561 GJL-200	1
21	Impeller	High Chrome Cast Iron	A532 Class TypeA	DIN 1695 G-X260Cr27	1
22	Suction Cover	Cast Iron	A48M Class30B	EN 1561 GJL-200	1
23	Suction Strainer	Steel	A283 Grade D	EN 10025 S275	1
25	Mechanical Seal	Silicon Carbide / H-70			1
26A	Oil Seal	NBR / TC-8011515			1
26B	Oil Seal	NBR / TC-8011515			2
26C	Labyrinth Ring	Stainless Steel	S 40300	1.4000	1
28	Seal Housing	Cast Iron	A48M Class30B	EN 1561 GJL-200	1
29	Oil Casing	Cast Iron	A48M Class30B	EN 1561 GJL-200	1
30	Oil Lifter	Steel (Cold Rolled )	A109/A1008	EN 10130	1
35A	Oil Plug	Stainless Steel	S 30400	1.4301	2
35B	Oil Plug	Stainless Steel	S 30401	2.4301	1
36	Lubricant	Turbine Oil ISO VG32 or SAE 10W-20			
37	Discharge Pipe	Steel Pipe (& Steel) / 10" ANSI Class150	A53 Type F (& A283 Grade D)	DIN 1615 St 33 (& EN 10025 S275)	1
46	Air Release Valve	Steel (Cold Rolled )	A109/A1008	EN 10130	1
50	Motor Bracket	Cast Iron	A48M Class30B	EN 1561 GJL-200	1
52A	Upper Bearing	#6312ZZC3			1
52B	Lower Bearing	#7317BDB			1
53	Motor Protector				3
54	Shaft	Stainless Steel	S 42000	1.4028	1
55	Rotor				1
56	Stator				1
60	Bearing Housing	Cast Iron	A48M Class30B	EN 1561 GJL-200	1
62	Bearing Cover	Cast Iron	A48M Class30B	EN 1561 GJL-200	1
64	Motor Housing	Cast Iron	A48M Class30B	EN 1561 GJL-200	1
65	Outer Cover	Steel	A283 Grade D	EN 10025 S275	1
71	Shaft Sleeve	Stainless Steel	S 40300	1.4000	1
90	Leak Sensor (Electrode)	Stainless Steel	S 30300	1.4305	1

**TSURUMI PUMP**

**GSZ-4 SERIES**  
**HIGH VOLUME - DEWATERING PUMPS**

**SAMPLE**  
**SPECIFICATIONS**

**1. SCOPE OF SUPPLY -**

Furnish and install TSURUMI Model \_\_\_\_\_ Submersible Pump(s).  
Each unit shall be capable of delivering \_\_\_\_\_ GPM ( \_\_\_\_\_ m<sup>3</sup>/min) at \_\_\_\_\_ Feet ( \_\_\_\_\_ m) TDH.  
The pump(s) shall be designed to pump waste water without damage during operation. The pump(s) shall be designed so that the shaft power required (BHP)/(kW) shall not exceed the motor rated output throughout the entire operating range of the pump performance curve.

**2. MATERIALS OF CONSTRUCTION -**

Construction of major parts of the pumping unit(s) shall be gray cast iron, ASTM A48 CLASS 35. Impellers and field adjustable/replaceable, wear plate shall be high chrome iron. Impellers shall be of the multi-vane enclosed solids handling design equipped with back pump out vanes and shall be slip fit to the shaft and key driven. Internal and external surfaces coming into contact with the pumpage shall be protected by a fused polymer coating. All exposed fasteners shall be stainless steel. All units shall be furnished with 150 lb. (10 kg/cm<sup>2</sup>) flat face flange and NPT companion flange.

**3. MECHANICAL SEAL -**

All units shall be furnished with a dual inside mechanical shaft seal located completely out of the pumpage, running in a separate oil filled chamber and further protected by an exclusionary oil seal located between the bottom seal faces and the fluid being pumped. The oil chamber shall be fitted with a device that shall provide positive lubrication of the top mechanical seal, (down to one third of the standard oil level). The device shall not consume any additional electrical power. Mechanical seals shall be rated to preclude the incursion of water up to 42.6 PSI. (98.4 Ft.) submergence. Units shall have silicon carbide versus silicon carbide upper and lower mechanical seal faces. Mechanical seal hardware shall be stainless steel. Unit(s) shall incorporate seal pressure relief ports. All unit(s) shall be fitted with a replaceable 403 stainless steel shaft sleeve.

**4. MOTOR-**

The pump motor(s) shall be \_\_\_\_\_ H p., \_\_\_\_\_ kW., \_\_\_\_\_ V., 60 Hz. 3 Phase and shall be NEMA MG-1, Design Type B equivalent. Motor(s) shall be rated at \_\_\_\_\_ full load amps. Motor(s) shall have a 1.15 service factor and shall be rated for 20 starts per hour. Motor(s) shall be air filled, copper wound, class F or E (60 Hp and above) insulated with built in thermal protection for each winding. Motor shaft shall be 420 stainless steel and shall be supported by two high temperature ball bearings, with a B-10 life rating at best efficiency point of 60,000 hours. The bottom bearing on units 50 Hp shall be two row, double shielded, C3, deep groove type ball bearing. The bottom bearing on units 60 Hp and above shall be two row, re-greasable, C3, angular contact type ball bearing. The top bearing on all units shall be single row, double shielded, C3, deep groove type ball bearing. Motors shall be star-delta start and shall be suitable for across the line start or variable speed applications, utilizing a properly sized variable frequency drive. Motor shall incorporate a steel water cooling jacket.

**5. POWER CABLE AND CABLE ENTRANCE -**

The pump power cable shall be suitable for submersible pump applications and shall be field replaceable utilizing standard submersible pump cable. The cable entrance shall incorporate built in strain relief and a combination three way mechanical compression sealing. The cable entrance assembly shall contain an anti-wicking block to eliminate water incursion into the motor due to capillary wicking should the power cable be accidentally damaged.