



 **TSURUMI PUMP**™
BUILT FOR WORK®

MY SERIES

EXPLOSION PROOF





The **AVANT MY Series** is a new offering of submersible pumps developed by Tsurumi Pump, a leader in the pump industry since 1924. The **AVANT MY Series** was created to deliver maximum customer satisfaction, using impressive knowledge in submersible pumps and wastewater treatment equipment. The **AVANT MY Series** combines quality material and premium engineering to be able to uphold the Tsurumi name. Tsurumi has been a leading company in the field of water solutions for nearly a century.



MY Series

Motors

From 2.5 to 20 HP

Hydraulics

- Open Channel (MYB)
- Chopper (MYCZ)
- Grinder (MYG)
- Vortex (MYU)


The **AVANT MY Series** is designed and built with a heavy emphasis on durability and pumping efficiency. These high quality pumps are highly reliable and smooth running compared to other pumps in the marketplace. In addition, for higher versatility, the **AVANT MY Series** offers four types of impellers (Open Channel, Chopper, Grinder and Vortex). Offered in discharge sizes from 2in. to 4in. with 2 and 4 pole motors from 2.5 to 20 HP.

Specifications

- Cast iron structure
- Three-phase motor from 2.5 to 20 HP
- Insulation: class H (356°F)
- Protection rating: IP68
- 60 Hz
- Thermal protection devices incorporated in stator
- AISI 431 drive shaft
- Two silicon carbide mechanical seals in large oil chamber
- Discharge from 2in. to 4in. ANSI Flange
- Large free passage



Overview of operating ranges

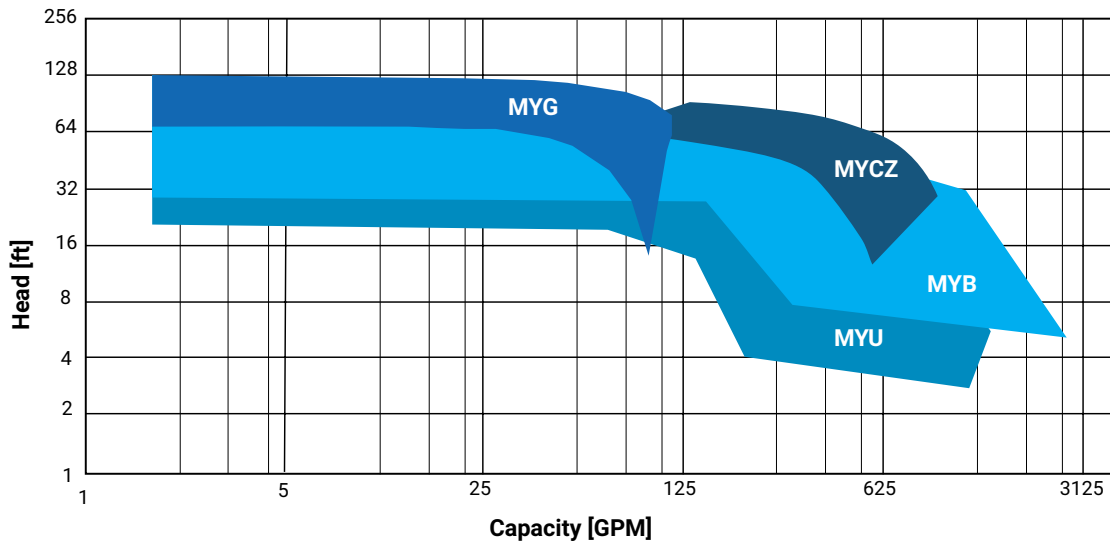

Construction materials


Motor casing	Cast iron GJL-250
Impeller	Cast iron GJL-250
Mechanical seals	Silicon carbide
Nuts and bolts	Stainless steel - class A2-70
Standard gaskets	Viton
Drive shaft	AISI 431 stainless steel
Grinder Mechanism	Chromium steel
Paint	Bicomponent epoxy paint with high resistance to corrosion

Operating specifications


Max operating temperature	104°F
pH of liquid	6 to 14
Max submergence	65 ft
Max liquid density	68 lb/ft ³
Max acoustic pressure	<70 dB
Max. starts/hour	20 (<12 HP) 15 (>12 HP)

Installations and accessories


Accessories are available to simplify installation.



FREE installation



PERMANENT installation



Installation with BOTTOM COUPLER



- Base plates**
- In cast iron or galvanized steel
 - Free standing installation



- Guide rail fitting devices**
- Cast iron body - stainless steel hardware
 - 3in. to 4in. ANSI

Features



1 HANDLE


Sturdy stainless steel handle for lifting and transport.

2 CABLE GLAND

Threaded cable gland allows connection of conduit to protect the power cable from mechanical or chemical damage.

3 PRESSURIZED TESTING

Every model undergoes pressurized testing to guarantee complete assembly and operation of the gaskets, cable gland, and mechanical seals.



4 SHAFT

The **AVANT MY Series** shaft is SUS431 grade stainless steel for superior strength, durability, and corrosion resistance properties. The shaft is tapered for easy assembly/disassembly.

5 SENSORS



The **AVANT MY Series** pumps are equipped with thermal sensors embedded on the stator windings that prevents the motor from over-heating. An overheat condition will allow the control panel to shut the pump down. For further protection, the leakage sensor is installed inside the oil chamber, allowing the detection of water intrusion.

6 MECHANICAL SEALS

Two silicon carbide mechanical seals protect the motor from water incursion. Isolation in the oil chamber prevents all contact between the mechanical seals and any solids or filaments in the wastewater.

OIL CHAMBER

A large oil chamber promotes longer mechanical seal life. A leakage detection sensor is standard in the oil chamber.

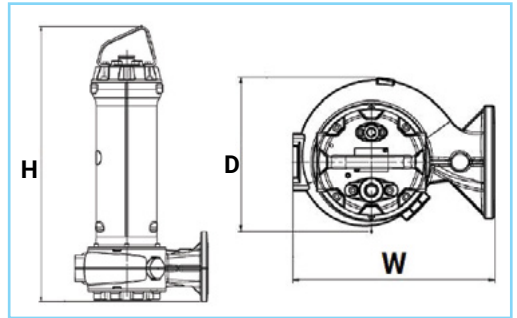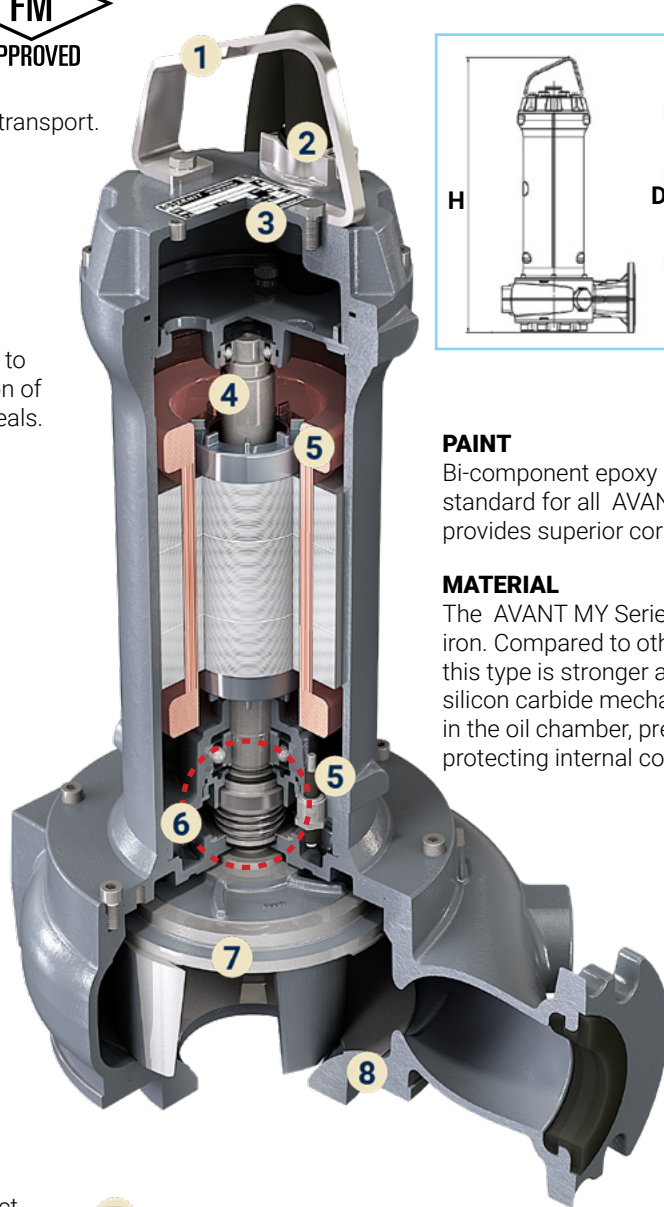


PAINT

Bi-component epoxy paint (7.9 thou) is used as standard for all AVANT MY Series pumps. This provides superior corrosion resistance.

MATERIAL


The AVANT MY Series uses FC250 grade cast iron. Compared to other pumps of its class, this type is stronger and more durable. Double silicon carbide mechanical seals are enclosed in the oil chamber, preventing leaks and protecting internal components.

7 IMPELLER

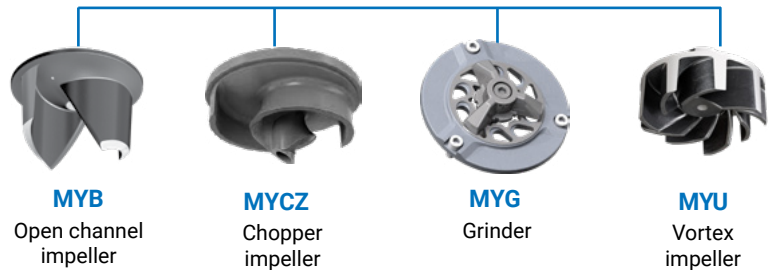

8 ANTI-CLOGGING SYSTEM

The anti-clogging system uses the centrifugal force of the impeller to pull out the stringy material via a spiral groove cut into the diffuser plate. This combination eliminates the fibrous material clogging of the impeller.



MYB (Open Channel)




Tsurumi's explosion proof open channel solids handling pump. Designed for raw sewage and wastewater in municipal, industrial and commercial applications. The MYB open channel impeller maximizes free passage of solids. Clogging risk is minimized through the anti-clog spiral groove within the pump's suction plate. Offered in 3in. and 4in. discharge sizes with motor sizes up to 15 HP.

Hydraulics


- Channel impeller
- Full free passage

Suitable for


- Solids laden wastewater
- Civil and industrial lift stations
- Sewage treatment systems and livestock wastewater

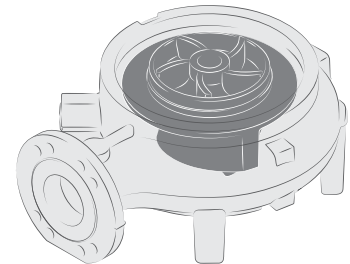

MYB: Open Channel (Stock)

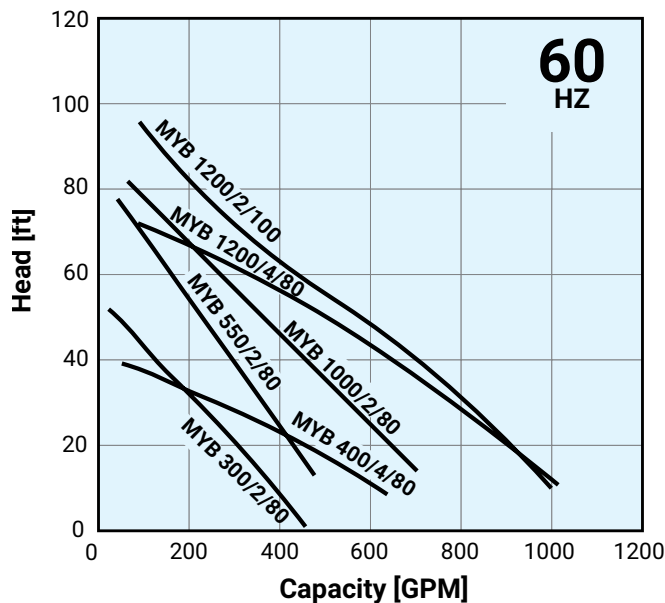

MYB: Open Channel (Non-Stock)

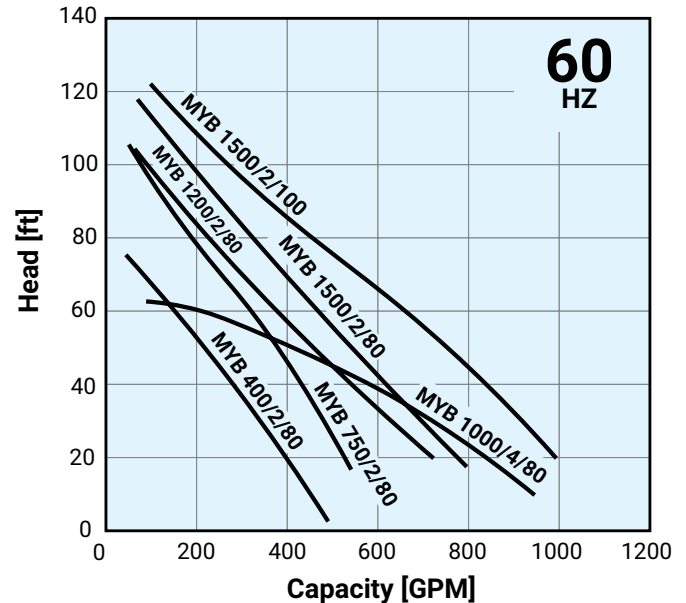

Model	Motor Output (HP)	Rated Current (A)		*S.S. (RPM)	Discharge Size (in.)	Max Head (ft)	Max Flow (gpm)	BEP Head (ft)	BEP Flow (gpm)	Dimensions (in.)			Free Passage (in.)
		230V	460V							H	W	D	
MYB 300/2/80	3	8.1	4.0	3600	3	52	460	28	225	22 1/2	13 1/2	10	1.38
MYB 400/2/80*	4	-	5.6	3600	3	75	490	47	230	24 1/2	13 1/2	10	1.18
MYB 400/4/80	4	11.7	5.9	1800	3	39	640	27	310	25 3/4	15 1/2	11 1/2	2.36
MYB 550/2/80	5.5	13.4	6.7	3600	3	78	480	46	260	26 3/4	13 1/2	10	1.57
MYB 750/2/80*	7.5	-	9.3	3600	3	105	540	61	300	26 3/4	13 1/2	10	1.57
MYB 1000/2/80	10	23.7	11.9	3600	3	83	700	46	370	30 7/8	13	11	1.97
MYB 1000/4/80*	10	-	13.9	1800	3	62	950	41	540	35 3/8	19 1/8	14 3/8	2.36
MYB 1200/2/80*	12	-	14.0	3600	3	104	730	62	370	33 3/8	13	11	1.97
MYB 1200/2/100	12	28.0	14.0	3600	4	96	1,000	48	610	33 5/8	16 3/8	12	1.77
MYB 1200/4/80	12	29.7	14.9	1800	3	72	1,020	48	550	38 1/2	19 1/8	14 3/8	2.36
MYB 1500/2/80*	15	-	16.9	3600	3	117	800	72	390	33 3/8	13	11	1.97
MYB 1500/2/100*	15	-	16.9	3600	4	122	1,050	65	610	33 5/8	16 3/8	12	1.77

*Non-Stock. Only Available In 460V.

*Synchronous Speed

MYCZ (Chopper)




Tsurumi's explosion proof solids handling chopper pump. Designed for municipal, industrial and commercial applications prone to fibrous solids. The chopping mechanism is formed by the rotating screw type channel impeller against the cast sharp tooth on the suction plate. Offered in 3in. and 4in. discharge sizes with motor sizes up to 20 HP.

Hydraulics


- Multi-Channel open impeller
- Cast chopper tooth suction plate

Suitable for


- Liquids containing large-sized solids which can be broken down
- Industrial process solids handling

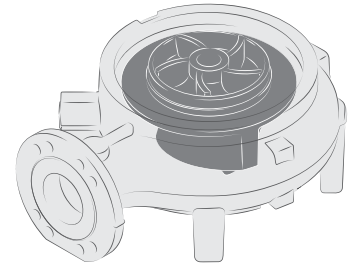

MYCZ: Chopper (Stock)

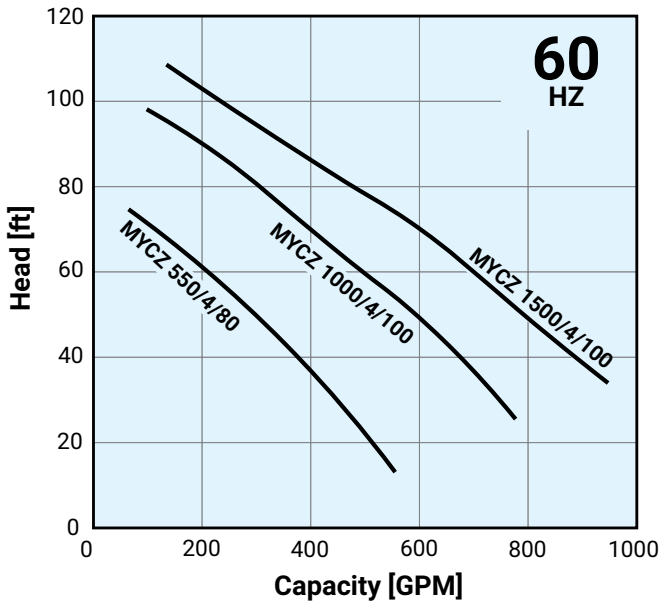

MYCZ: Chopper (Non-Stock)

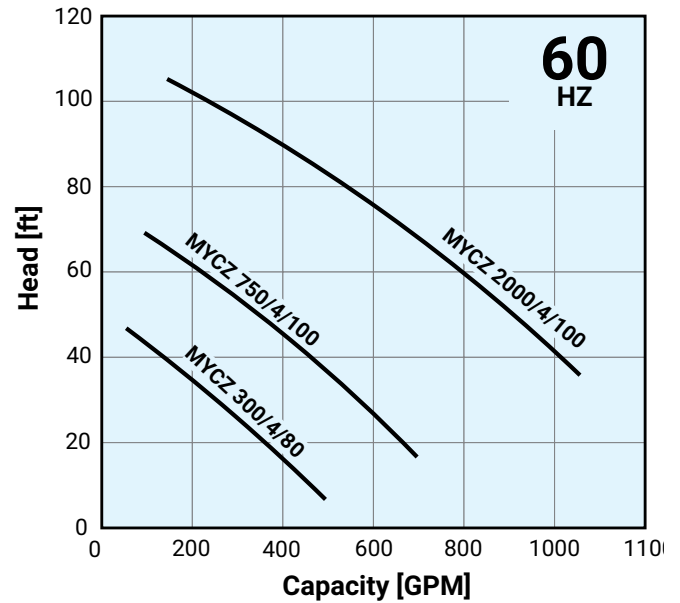

Model	Motor Output (HP)	Rated Current (A)		*S.S. (RPM)	Discharge Size (in.)	Max Head (ft)	Max Flow (gpm)	BEP Head (ft)	BEP Flow (gpm)	Dimensions (in.)			Free Passage (in.)
		230V	460V							H	W	D	
MYCZ 300/4/80*	3	-	4.6	1800	3	47	495	28	270	25 1/4	16	13 3/8	1.26
MYCZ 550/4/80	5.5	14.8	7.4	1800	3	62	555	40	300	30 3/8	16	13 3/8	1.18
MYCZ 750/4/100*	7.5	-	10.4	1800	4	69	690	42	430	31	18 5/8	16 1/8	1.42
MYCZ 1000/4/100	10	27.8	13.9	1800	4	82	780	52	470	33 3/4	18 5/8	16 1/8	1.34
MYCZ 1500/4/100	15	35.6	17.8	1800	4	90	950	56	635	38 1/2	19 1/2	16 3/8	1.73
MYCZ 2000/4/100*	20	-	26.9	1800	4	105	1,060	69	695	42	19 1/2	16 3/8	1.65

*Non-Stock. Only Available In 460V.

*Synchronous Speed

MYG (Grinder)




Tsurumi's explosion proof solids handling grinder pump. Designed for high pressure small diameter piping within municipal, industrial and commercial applications. Solids are cut into fine particles by the chromium tri-blade grinder mechanism and moved through the pump via multi-channel impeller. Offered in 2in. discharge size with motor sizes up to 10 HP.

Hydraulics


- Multi-Channel open impeller
- Grinding system with rotary knife

Suitable for


- Soiled liquids containing fibers and filaments
- Commercial, industrial, and municipal applications
- Livestock farms



MYG: Grinder (Stock)

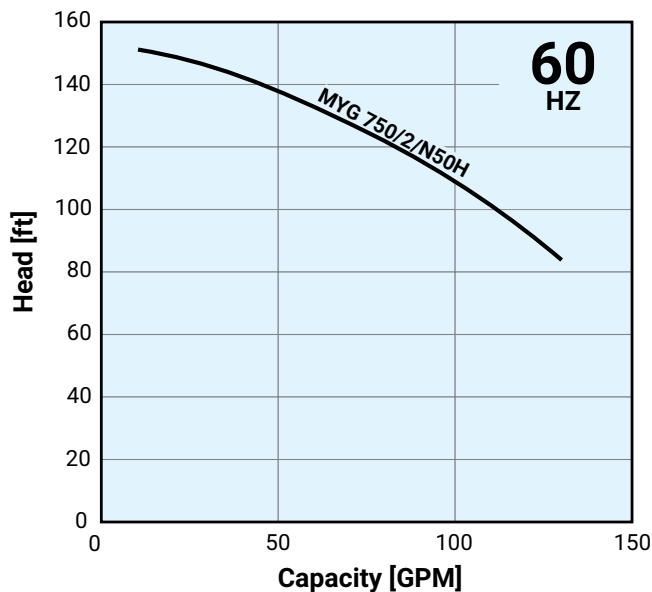

MYG: Grinder (Non-Stock)

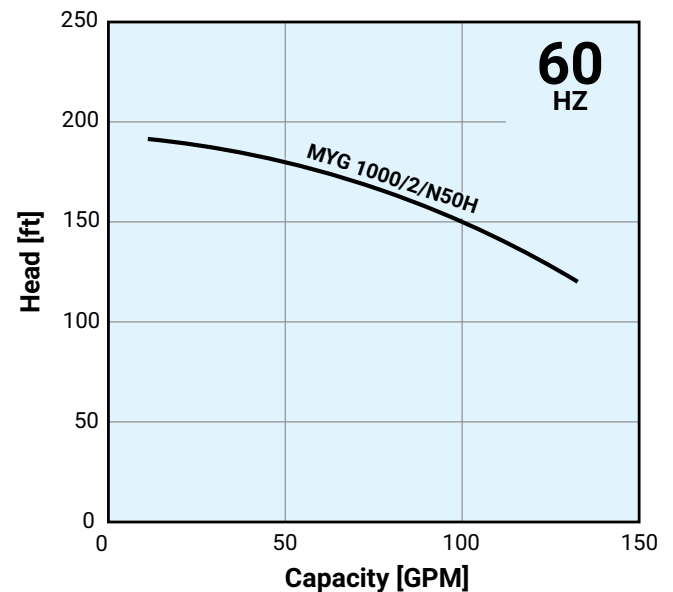

Model	Motor Output (HP)	Rated Current (A)		*S.S. (RPM)	Discharge Size (in.)	Max Head (ft)	Max Flow (gpm)	BEP Head (ft)	BEP Flow (gpm)	Dimensions (in.)			Free Passage (in.)
		230V	460V							H	W	D	
MYG 750/2/N50H	7.5	18.5	9.3	3600	2	151	127	112	95	25 3/4	14	10 3/8	-
MYG 1000/2/N50H*	10	-	11.9	3600	2	191	132	143	110	28 5/8	14	10 3/8	-

*Non-Stock. Only Available In 460V.

*Synchronous Speed

MYU (Vortex)




Tsurumi's explosion proof vortex pump. Designed for water circulation, civil lift stations, and storm water drainage systems. Open space within the pump volute maximizes free passage while minimizing abrasive wear on the impeller. Offered in 2.5in. to 4in. discharge sizes with motor sizes up to 12 HP.

Hydraulics


- Vortex impeller
- Full free passage

Suitable for


- Industrial and process water recirculation
- Civil lift stations
- Sewage and storm water drainage systems



MYU: Vortex (Stock)

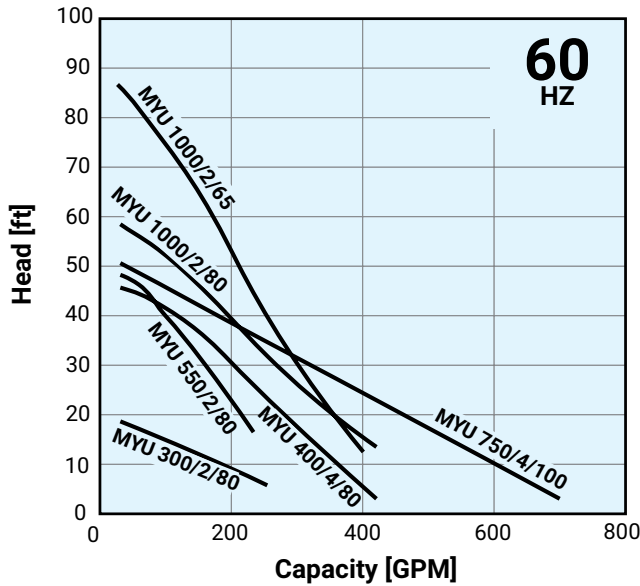

MYU: Vortex (Non-Stock)

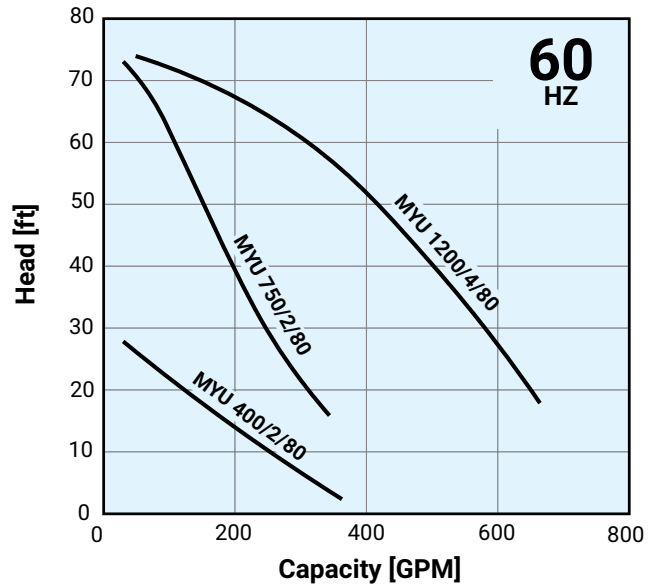

Model	Motor Output (HP)	Rated Current (A)		*S.S. (RPM)	Discharge Size (in.)	Max Head (ft)	Max Flow (gpm)	BEP Head (ft)	BEP Flow (gpm)	Dimensions (in.)			Free Passage (in.)
		230V	460V							H	W	D	
MYU 300/2/80	3	8.1	4.0	3600	3	19	260	12	160	23 3/4	12 3/8	9 1/8	3.15
MYU 400/2/80*	4	-	5.6	3600	3	29	365	15	185	25 3/4	12 1/4	9 1/8	3.15
MYU 400/4/80	4	11.7	5.9	1800	3	46	460	32	185	27 1/4	15 3/8	12	3.15
MYU 550/2/80	5.5	13.4	6.7	3600	3	48	230	31	140	29 3/8	12 1/2	10	2.56
MYU 750/2/80*	7.5	-	9.3	3600	3	73	345	44	185	28	12 5/8	9 3/4	2.68
MYU 750/4/100	7.5	20.9	10.4	1800	4	51	700	34	220	33	16 1/8	12	3.15
MYU 1000/2/65	10	23.7	11.9	3600	2.5	87	400	60	160	31 7/8	12	9	2.56
MYU 1000/2/80	10	23.7	11.9	3600	3	59	420	39	200	32 1/4	12 1/2	10	3.15
MYU 1200/4/80*	12	-	14.9	1800	3	74	665	57	340	38 5/8	19 1/8	14 3/4	2.36

*Non-Stock. Only Available In 460V.

*Synchronous Speed

Product colors may vary in actual appearance, features are highlighted for illustrative purposes.

